

PULLMAN SUPPLEMENT

Pullman Seating Options

To make up the forward and rear facing passenger seats,

- 1, Undo curtain from tie-back.
- 2, Remove forward seat cushion (A) and move the centre cushion (B) to replace it, ensuring the seatbelt is out of the locker storage.
- 3, Tilt front passenger seat-back forward and position cushion (A) into a vertical position. Position cushion (A) to assist with securing lower spring lock, remove top spring lock from Velcro on pelmet and secure by pushing cushion (A) forward a little. Return passenger seat to an upright position giving additional support to cushion (A).
- 4, Remove fixed end of seatbelt from Velcro.
- 5, To remove the centre moulding undo the locking bolts and stow the moulding behind the passenger seat.
- 6, Remove cushion C to free seat belt.
- 7, Slide the headrest cushion onto the worktop.
- 8, Retain the headrest in a vertical position by using the turnbuckle.
- 9, Unclip both table supports
- 10, Locate table leg by depressing button, Ensure sprung clip is securely located.
- 11, Locate table onto support rail. The table may be slid along the rail to ease access for passengers, but should be slightly raised to slide it.
- 12, The table may also be used as a bed support by locating it into the recesses provided, this option replaces the centre bed support. The other two wooden bed supports should be in place prior to bed making.
From the off side, slide the cushions over to make up the bed.
- 13, If you require the use of the bed extension remove cushion D.
- 14, Unfold the bed extension rests on either side of the vehicle
- 15 Place the bed extension. (D) in position.
- 16, Other options for the table are, centered without removal of cushions, or as an extension to the worktop.

The numbers above correspond to the illustration numbers.

Note,

Please disregard the bed-making instruction displayed in the standard handbook.

This document is provided free of charge for the purpose of reference only and for personal use.
The document remains the property of www.smallmotorhome.co.uk at all times and the resale of these documents is strictly prohibited.

By downloading this document from this website you agree to abide by these terms.

PULLMAN MODEL Guidance on Owner usage

The Romahome is sold as a two berth motor home.

The seating configuration of the Pullman allows 4 persons to travel in comfort.

However the driver must be aware of the weight limitation imposed by the capacity of the vehicle. (see page 5 of the handbook)

Therefore he/she must consider the weight carried in the vehicle and how it is distributed over the axles.

Other weight considerations may be Fuel, Spare wheel, Water, Gas cylinders and Luggage.

www.smallmotorhome.co.uk

The Romahome Double Pullman is sold as a two berth motorhome and is built on the Berlingo 800kg chassis.

The Double Pullman could be mistaken for a 6 passenger vehicle.

It must be made clear to the new owners they must not exceed the gross vehicle weight of 1955kg on the 1.9D or 1990kg on the 2.0 HDi


If in doubt that you may be exceeding the vehicle's safe working load, a quick visit to your local weighbridge would be worth while, the usual fee is around £3.00 giving you peace of mind.

75kg or 165lb per person is usually quoted as a nominal weight for each passenger.

This document is provided free of charge for the purpose of reference only and for personal use.

The document remains the property of www.smallmotorhome.co.uk at all times and the resale of these documents is strictly prohibited.

By downloading this document from this website you agree to abide by these terms.

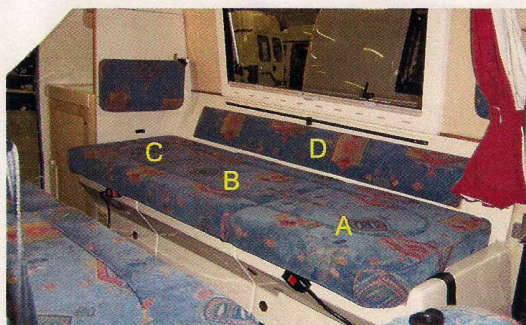


Seating layout




1 Undo curtain from tie-back



2 Remove cushion A

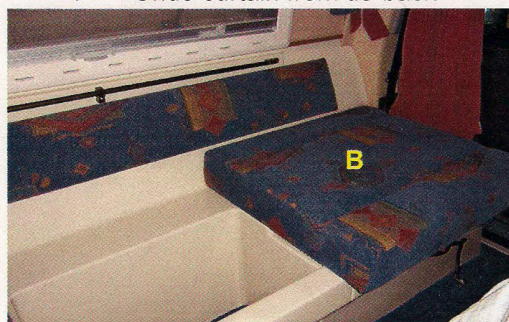

2 Move cushion B to replace A

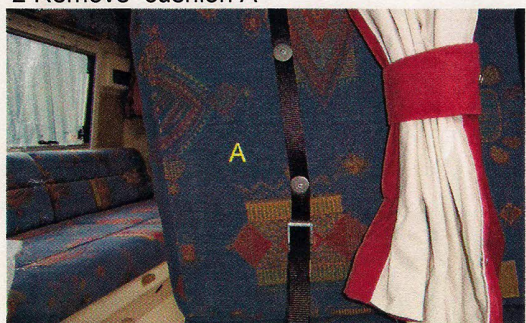

3 Position Cushion A, secure lower spring lock



3 Position Cushion A, secure top spring lock




4 Remove fixed end of seatbelt from Velcro



5 Remove centre moulding



6 Remove cushion C to free seat belt

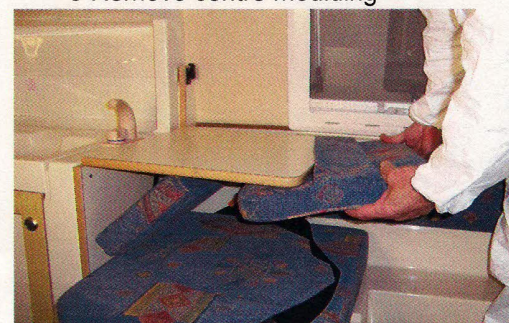

7 Slide headrest cushion onto worktop

Photos by

Sam Anderson


This document is provided free of charge for the purpose of reference only and for personal use. The document remains the property of www.smallmotorhome.co.uk at all times and the resale of these documents is strictly prohibited.

By downloading this document from this website you agree to abide by these terms.


cushion
14" x 18"
pocket on back 4" from top




8 Retain in a verticle position using turnbuckle

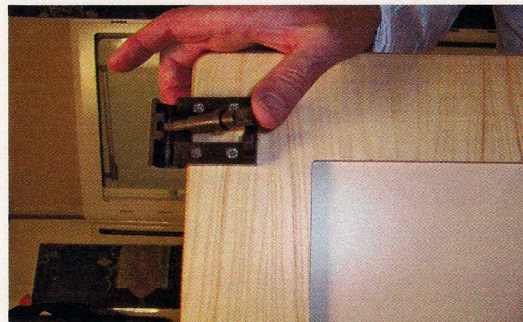

9 Unclip both table supports

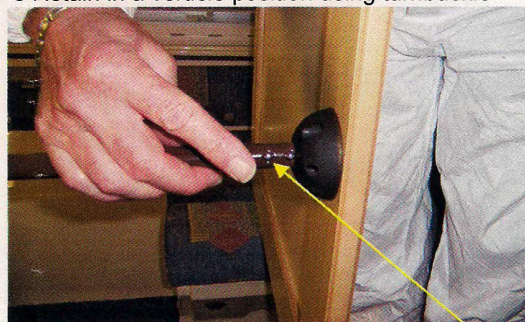

10 locate table leg by depressing button

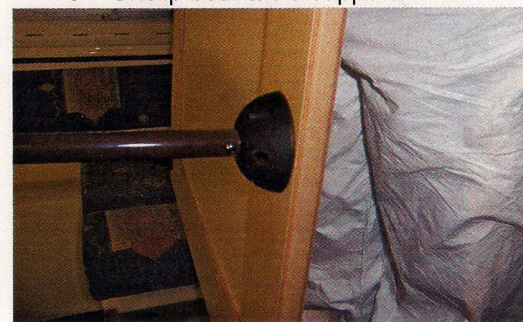

10 Showing table leg locked in position



11 Locate table onto table support rail




11 Showing Table in use




12 showing the table used as a bed support



12 slide seat across and back cushion down

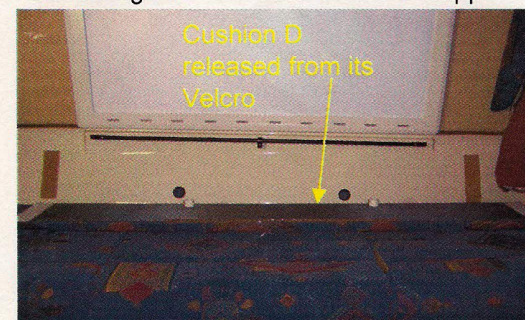

13 Remove cushion D if you require a bed extension

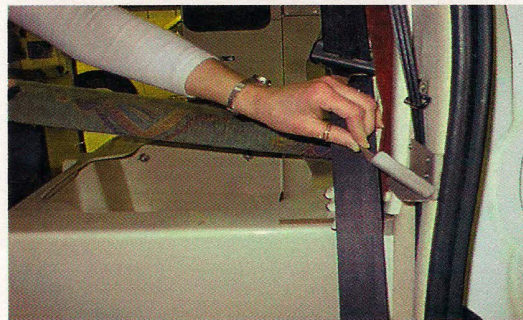


14 Bed extension rests being folded down

Photos by

Sam Anderson

This document is provided free of charge for the purpose of reference only and for personal use. The document remains the property of www.smallmotorhome.co.uk at all times and the resale of these documents is strictly prohibited.

By downloading this document from this website you agree to abide by these terms.

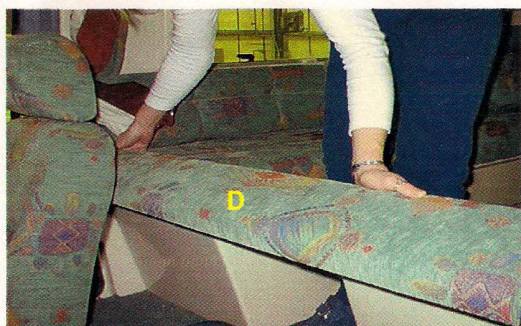

15 Bed extension being put in place



16 Optional table positions



16 Optional table positions

www.smallmotorhome.co.uk

The numbers above correspond to the written instruction numbers

This document is provided free of charge for the purpose of reference only and for personal use.
The document remains the property of www.smallmotorhome.co.uk at all times and the resale of these documents is strictly prohibited.

By downloading this document from this website you agree to abide by these terms.